

Setting up kubernetes Cluster

Going to be setting up a K8 cluster on Rocky Linux

- [Installing the Nginx Load Balancer](#)
- [Installing docker and kublet on the systems](#)
- [Installing setting up the first k8 Controller](#)
- [Setting up kubernetes on Rocky Linux](#)

Installing the Nginx Load Balancer

First we need to install the nginx load balancer with a configuration that points to the two kubernetes Controllers.

Installing docker and kublet on the systems

We need to install docker and kublet on all the systems that are going to be participating in the k8 Cluster

Installing setting up the first k8 Controller

Once the first controller gets installed the others will fall right in line since the configuration comes from the first controller.

Setting up kubernetes on Rocky Linux

Install kubernetes cluster and nginx

What is needed and how they will be used

We will be using 2 control plan nodes, 4 worker/agent nodes and eventually 3 nodes for storage. One will also be used as a reverse proxy using Nginx.

The DNS server that will be used is currently running on a raspberry pi, it is running PiHole and has a local DNS server.


This is an initial install of Kubernetes on Rocky Linux 8.5.

- 1 x Nginx proxy running Rocky Linux 8.5, 2CPU, 4 GB RAM, 32 GB disk
- 2 x VM's for control plane Rocky Linux 8.5, 2CPU, 4 GB RAM, 32 GB disk
- 4 x VM's for Worker nodes Rocky Linux 8.5, 2CPU, 4 GB RAM, 32 GB disk
- 3 x VM's for storage nodes Rocky Linux 8.5, 2CPU, 4 GB RAM, 32 GB disk

Hostname	IP Address	Description
nlb.binglab.lan	10.14.1.80	Load balancer
mb1prrkubctl001.binglab.lan	10.14.1.81	Kubernetes Control plane
mb1prrkubctl002.binglab.lan	10.14.1.82	Kubernetes Control plane
mb1prrkubwkr001.binglab.lan	10.14.1.83	Kubernetes Worker node
mb1prrkubwkr002.binglab.lan	10.14.1.84	Kubernetes Worker node
mb1prrkubwkr003.binglab.lan	10.14.1.85	Kubernetes Worker node

mb1prrkubwkr004.binglab.lan	10.14.1.86	Kubernetes Worker node
mb1prrkubsto001.binglab.lan	10.14.1.87	Kubernetes Storage node
mb1prrkubsto002.binglab.lan	10.14.1.88	Kubernetes Storage node
mb1prrkubsto003.binglab.lan	10.14.1.89	Kubernetes Storage node

Network Diagram

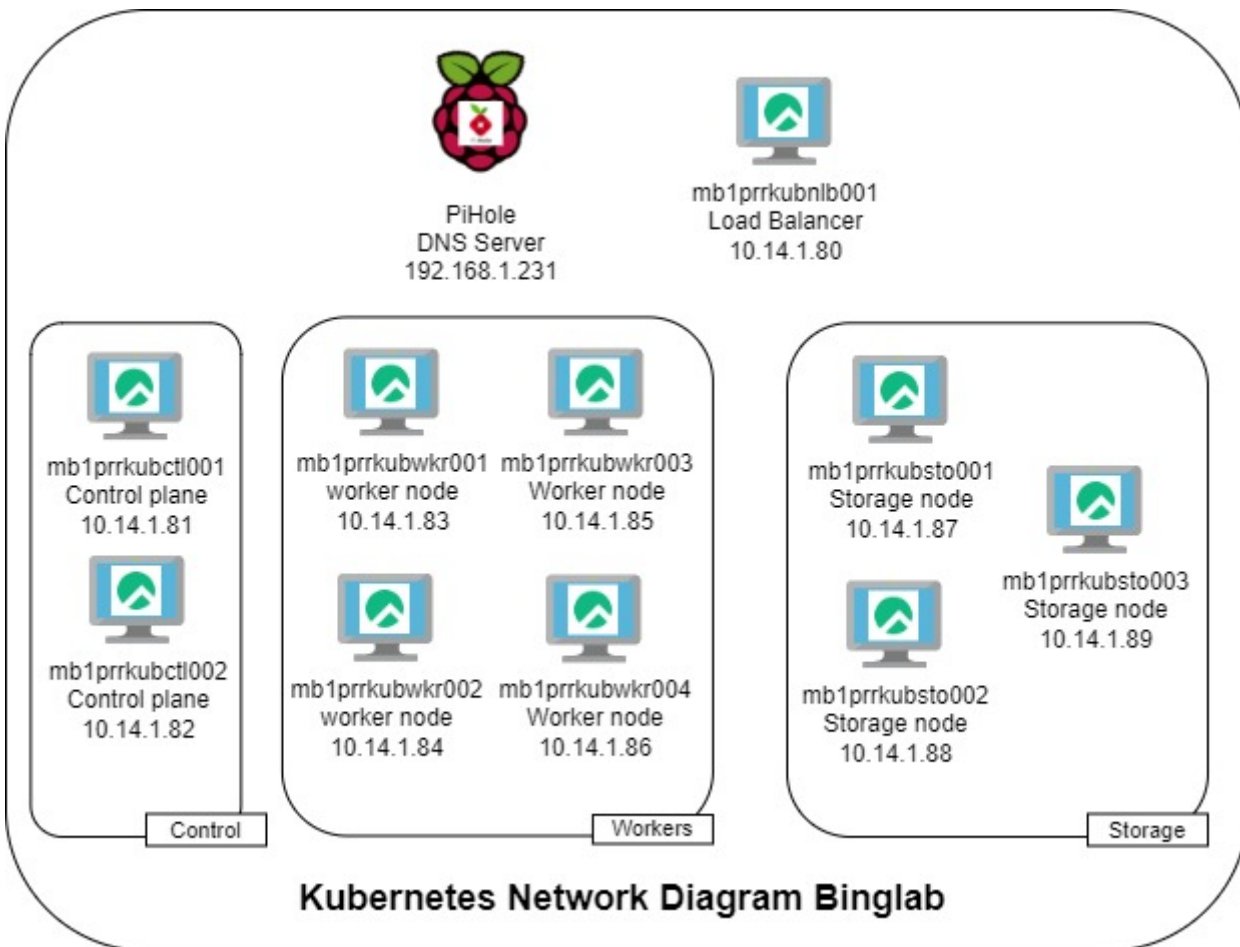

Software/Stack used

- Rocky Linux 8.5
- kubelet
- Kubectl
- Kubernetes-cni
- docker-ce

1 First install the load balancer

1.1 Install package

```
yum install nginx
```

1.2 configure Nginx

```
# For more information on configuration, see:
#   * Official English Documentation: http://nginx.org/en/docs/
#   * Official Russian Documentation: http://nginx.org/ru/docs/

user nginx;
worker_processes auto;
error_log /var/log/nginx/error.log;
pid /run/nginx.pid;

# Load dynamic modules. See /usr/share/doc/nginx/README.dynamic.
include /usr/share/nginx/modules/*.conf;

events {
    worker_connections 1024;
}

stream {
    upstream k3s_servers {
        server 10.14.1.81:6443;
        server 10.14.1.82:6443;
    }
    server {
        listen 6443;
        proxy_pass k3s_servers;
    }
}
```

2 Install Docker on the other nodes 6 for now

```
yum update
yum install -y yum-utils
sudo yum-config-manager --add-repo https://download.docker.com/linux/centos/docker-ce.repo
yum remove docker docker-client docker-client-latest docker-common docker-latest docker-
latest-logrotate docker-logrotate docker-engine
yum install docker-ce docker-ce-cli containerd.io
systemctl start docker
```

```
systemctl enable docker
systemctl status docker
docker ps
```

3 Install Kubernetes but first we need to add the repo on all the nodes

```
cat <<EOF | sudo tee /etc/yum.repos.d/kubernetes.repo
[kubernetes]
name=Kubernetes
baseurl=https://packages.cloud.google.com/yum/repos/kubernetes-el7-`basearch`
enabled=1
gpgcheck=1
repo_gpgcheck=1
gpgkey=https://packages.cloud.google.com/yum/doc/yum-key.gpg
https://packages.cloud.google.com/yum/doc/rpm-package-key.gpg
exclude=kubelet kubeadm kubectl
EOF
```

Once the repo is added we need to install the kubernetes packages: on all the nodes

```
dnf install -y kubelet kubeadm kubectl --disableexcludes=kubernetes
systemctl enable --now kubelet
echo "KUBELET_EXTRA_ARGS=--cgroup-driver=cgroupfs" | sudo tee /etc/sysconfig/kubelet
systemctl restart kubelet
systemctl status kubelet
echo "net.bridge.bridge-nf-call-iptables=1" | sudo tee /etc/sysctl.d/k8s-iptables.conf
echo "net.bridge.bridge-nf-call-ip6tables=1" | sudo tee /etc/sysctl.d/k8s-ip6tables.conf
sysctl --system
```

4 Install the first control plane node of cluster

```
kubeadm init --kubernetes-version "1.23.4" --pod-network-cidr "192.168.1.0/16" --service-dns-domain "apps.binglab.lan" --control-plane-endpoint "mb1prrkubnlb001.binglab.lan:6443" --upload-certs
```